


# OMNIA

Wi-Fi Smart Devices



Smart 4 channel Relay  
OTWB-4CHRF

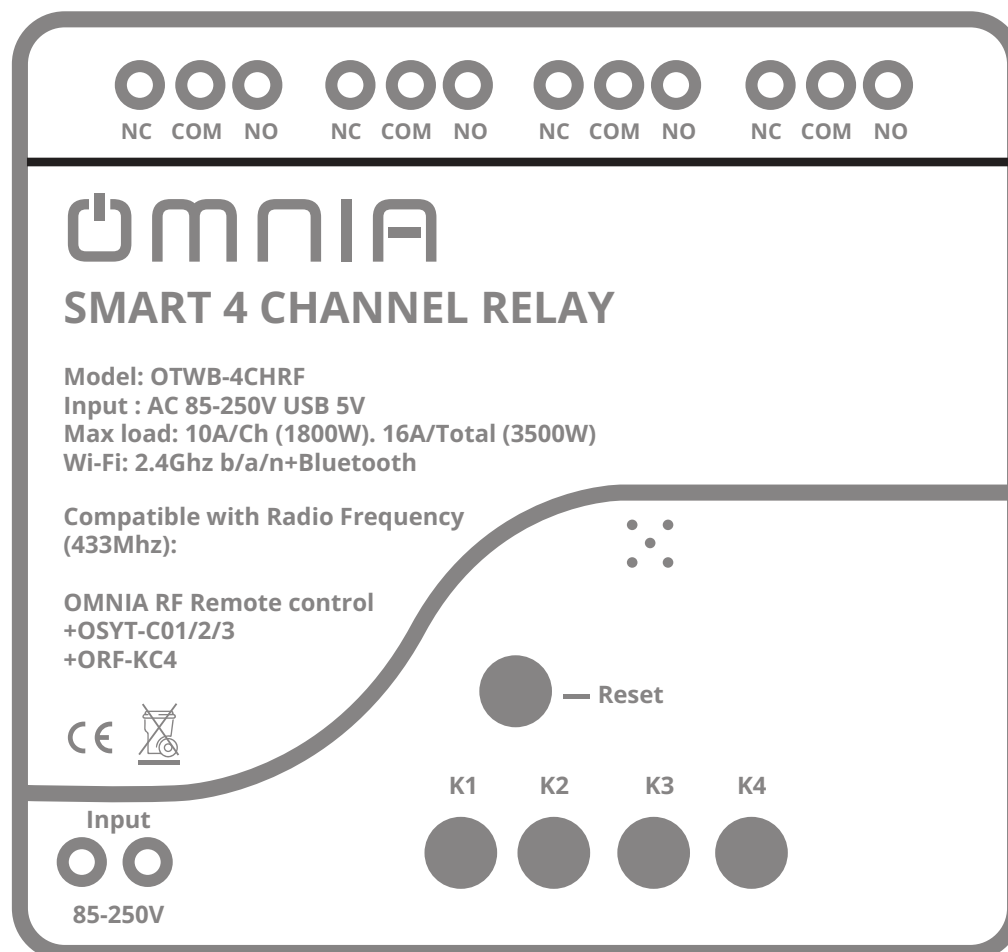


## 1.1 Parameters:

Input voltage: AC 85V~250V /USB 5V  
Max.Current: 1800W/10A/gang  
Max.load: 3500W/16A/4 gang  
Wireless:Wi-Fi 2.4ghz b/g/n+Bluetooth  
Frequency radio:433Mhz  
Working temperature: - 20°C~70°C  
Size: 81\*76\*28mm

## 1.2 Checklist before using the device

- Your smart phone or tablet has connected to a 2.4g WiFi with internet.
- You need to enable Bluetooth on your phone
- You have the correct WiFi PWD.
- You smart phone or tablet must have the app Smart Life downloaded.
- Your router is MAC-open.

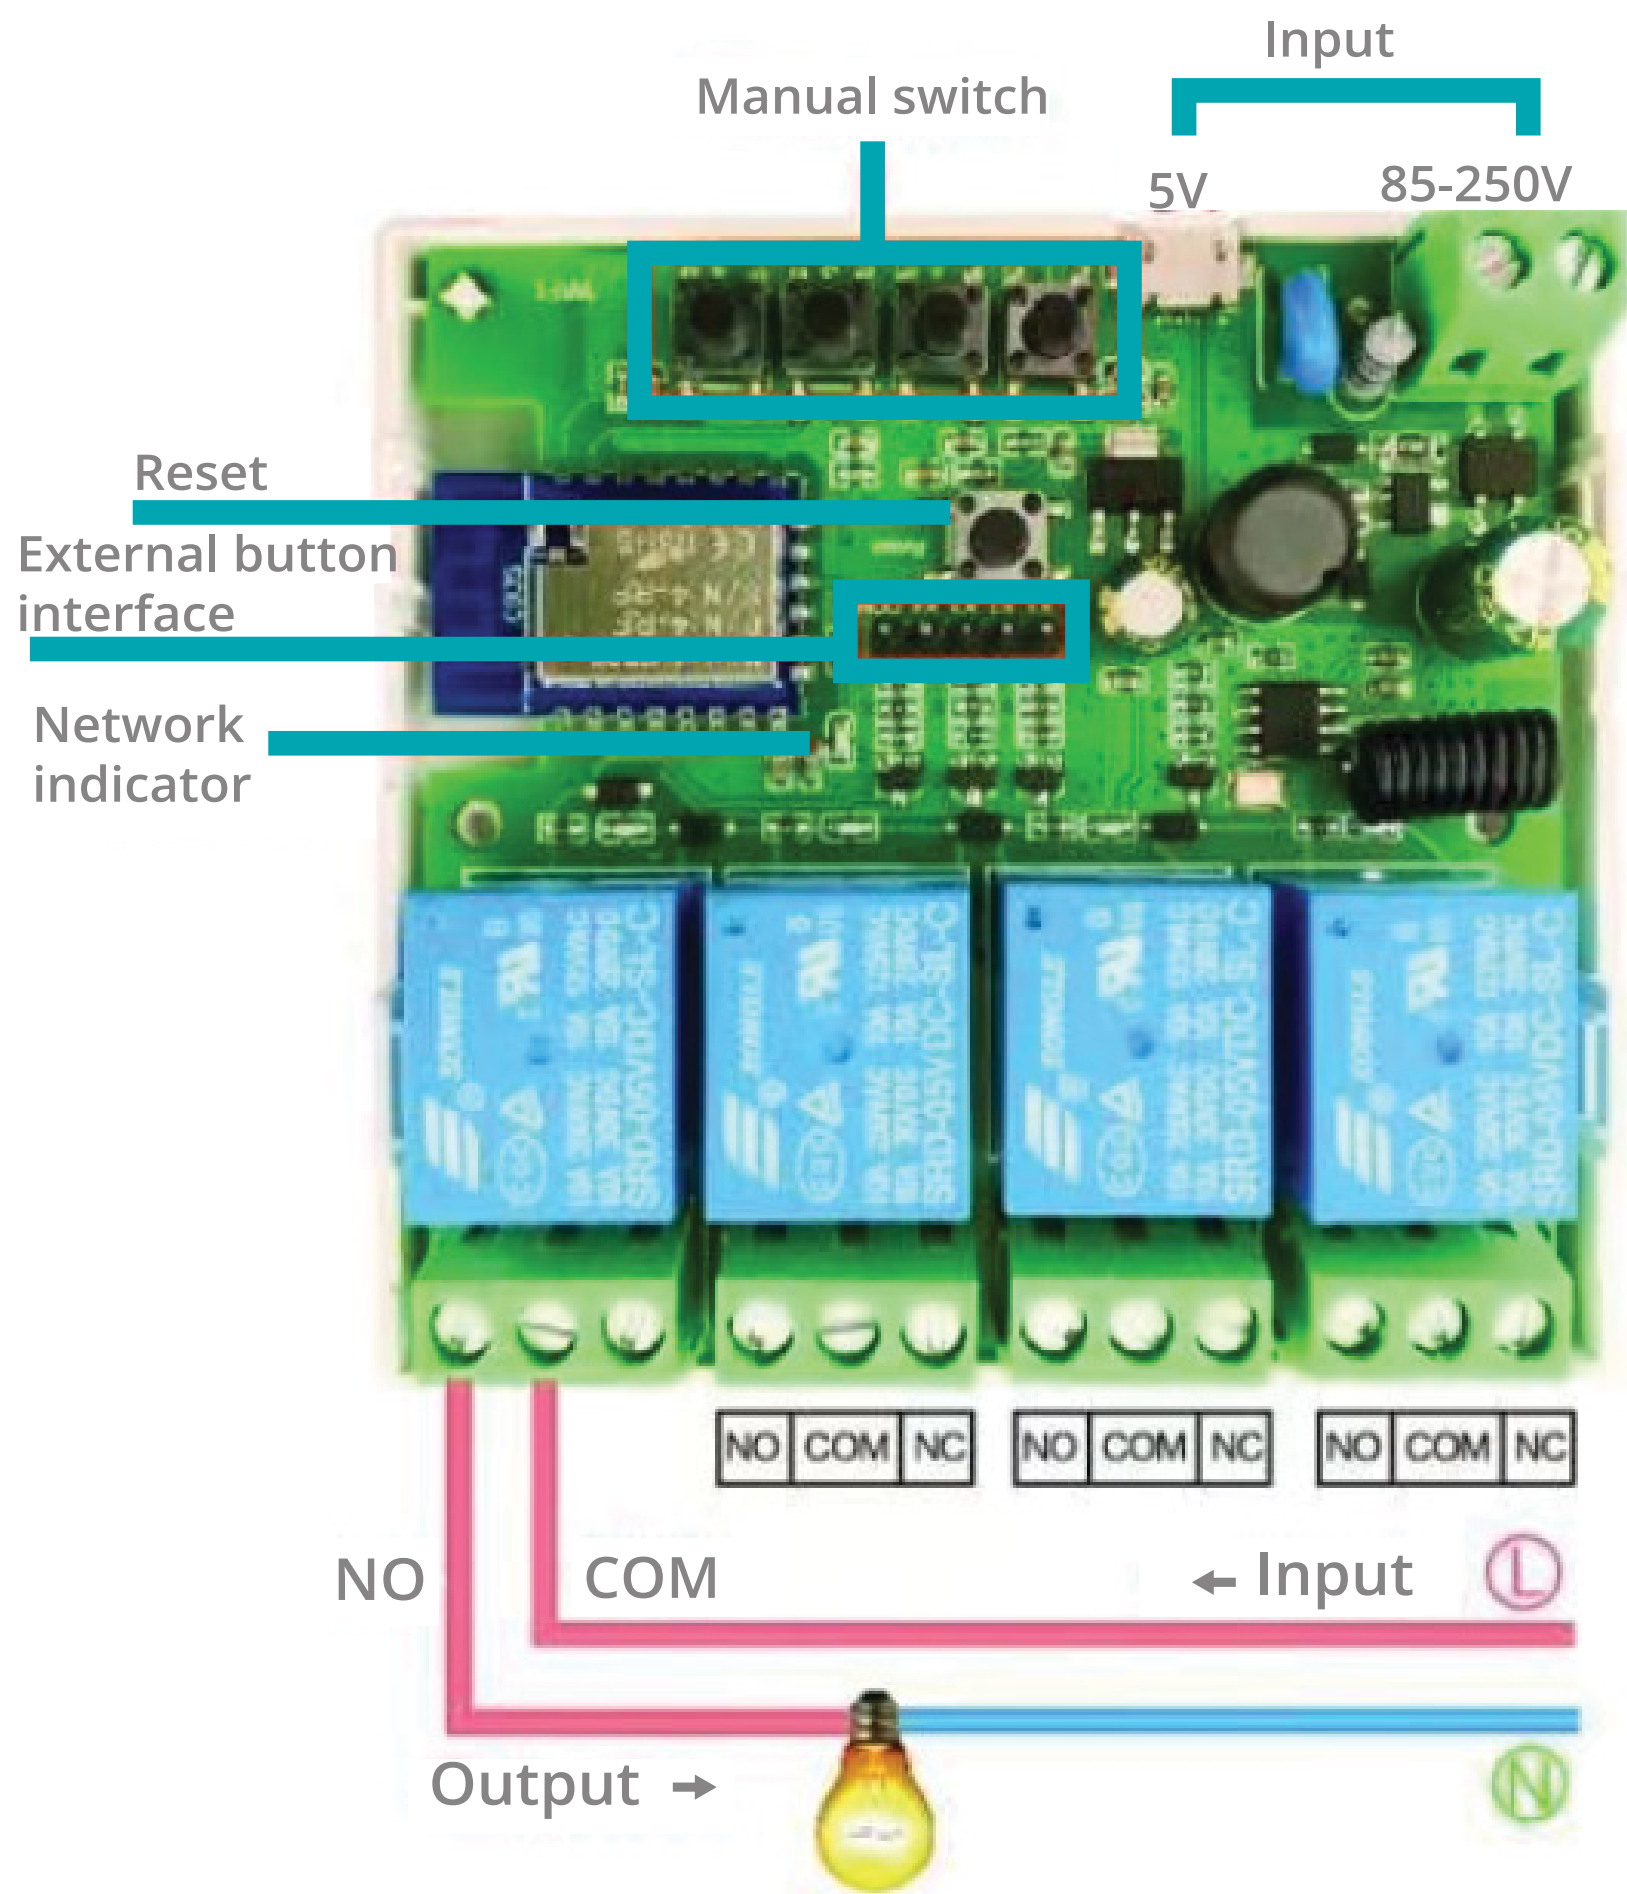

## 1.3 User Guide

- 1.You can download the App by searching Smart Life in mobile app stores or scanning the following QR code
- 2.Register an Smart Life account.
- 3.If you have Smart Life account. just login.



## 1.4 Add devices

1.Reset the device first: if the network indicator (red light) blinking fast, skip the reset step.

1.1 Power on

1.2 Hold down the Reset button for 5 seconds.

Until network indicator (red light) blinks fast(0.5s/time).

2.Clicking + in the top right corner on Smart Life App. then click "Add Device" ,wait a few seconds, After the devices are found,Click "Next"



## Add Device




Searching for nearby devices. Make sure your device has entered [pairing mode](#).


3. Select a 2.4GHz Wi-Fi network and enter your password..

**Select 2.4 GHz Wi-Fi Network and enter password.**

If your Wi-Fi is 5GHz, please set it to be 2.4GHz.  
[Common router setting method](#)

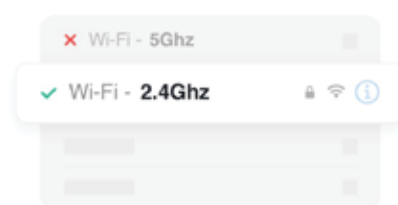

4. Name your device.

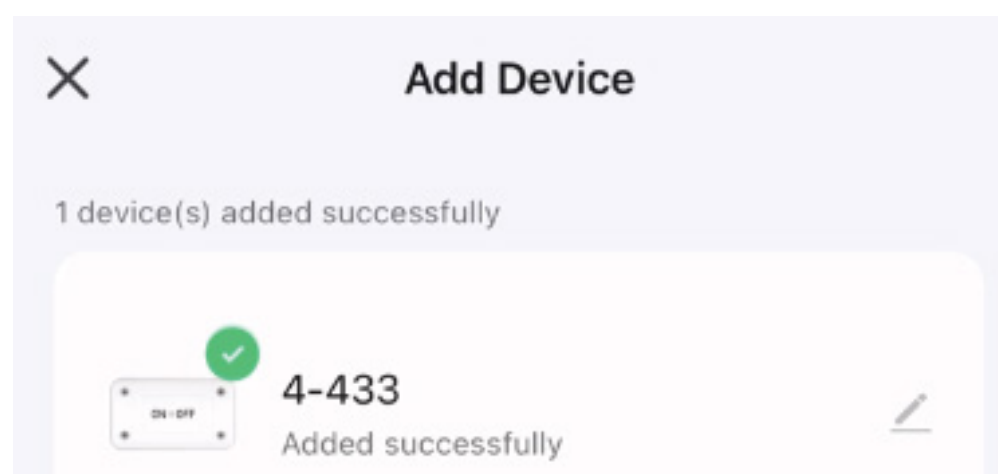

5. When the network is disconnected, the switch will automatically switch to the Bluetooth control of the phone.

6. It's possible to turn on/off on the APP. Manual control by the physical buttons on the device is also possible.

# 1.5 APP Function



/Rename  
/Offline Notification  
/Share Device  
/Create Group  
/Remove Device

Long press the switch  
to change the name  
and icon

/Schedule  
/Countdown  
/Sunrise / Circulate  
/Random

/Relay Status  
/Switch Type Setting  
/Interlock Setting  
/RF Remote Control Setup

## 1.6 RF Remote Control Paring

### Paring:

- 1.Click settings on the device interface> RF Remote control setup > Add
- 2.When the prompt interface pops up,then long press the remote control button you want to match
- 3.Stop pressing the remote control button, paring should be successful
- 4.Added successfully, assign the remote control buttons to the switches that need to be controlled \*match other buttons, repeat steps 1to 4.

Compatible with OMNIA radio frequency remote control (433MHz):

## WORKS WITH



OSYT-C01/2/3



ORF-KC4



# Smart 4 channel Relay OTWB-4CHRF

## User Manual

[www.smartomnia.com](http://www.smartomnia.com)



[smart.omnia](https://www.instagram.com/smart.omnia)



[smartomniacr](https://www.facebook.com/smartomniacr)